



# PowerView® SERIAL API

## PowerView® Serial API

**⚡ IMPORTANT**

The serial API is for hub gen1 only. hub gen2 onwards will only support the above described http API

You will need a separate Serial connection cable for a serial connection to the Hub (sold separately).

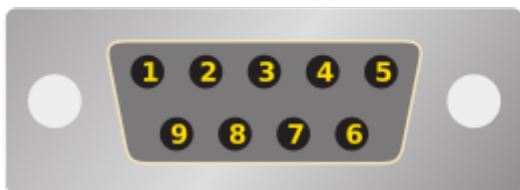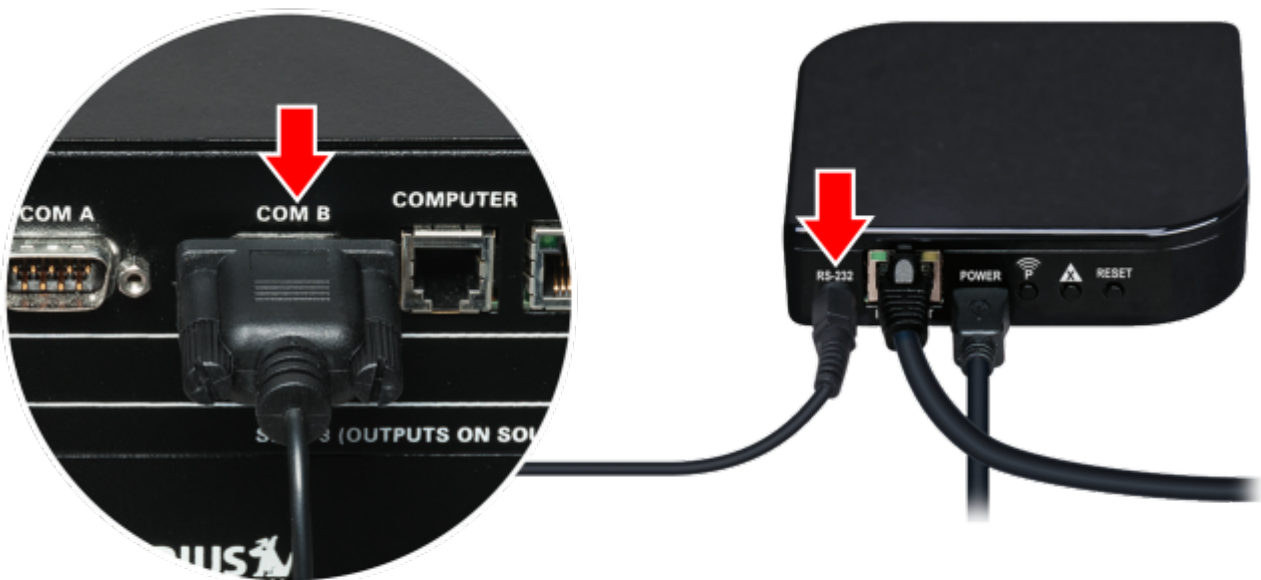

Pin	Signal	Direction	Description
2	RDX	to computer	Receive data
3	TDX	from computer	Transmit data
5	GND	.	Ground

- COM port settings: speed: 9600, stop bit: 1, Parity: None.
- Each request to the Hub begins with a ? followed by a two-character ASCII command. Each successful response from the Hub begins with a ! followed by the same two ASCII characters.

- All messages are terminated with a carriage return `x0D` . In this document a carriage return is designated as `<cr>`
- Scene and Room identifiers are transmitted as an ASCII string representing an integer value ranging from zero (0) to 65535.
- Names of Scenes and Rooms are always located as the last parameter of a response and may include spaces.

## Request scene count

To retrieve the list of Scenes that have been configured and stored in the PowerView® Hub, a request is first sent to the Hub requesting the total number of Scenes stored

### serial command

```
?SC <cr>
```

### Hub response

```
!SC <count> //the number of scenes programmed in the hub.
```

## Request a Scene Object

Specific information about each individual Scene may be retrieved by sending a series of requests to the Hub. Each request includes an index within a range from one (1) to the total scene count.

### serial command

```
?S0 <index> <cr>
```

### Hub response

```
!S0 <index> <scene ID> <room ID> <name>
```

## Request list of scene objects

Specific information about all Scenes may be retrieved by sending a single request to the Hub.

### serial command

```
?SL <cr>
```

## Hub response

```
!SL
<scene1 ID> <roomX ID> <name1>
<scene2 ID> <roomY ID> <name2>
<scene3 ID> <roomZ ID> <name3>
...
```

## Execute one or more scenes

A list from one (1) to 28 Scenes may be executed using a single command.

### serial command

```
?SE <scene ID 1> <scene ID 2> ...<scene ID 28> <cr>
```

## Hub response

```
!SE
```

---

